PRELIMINARY DRAWING

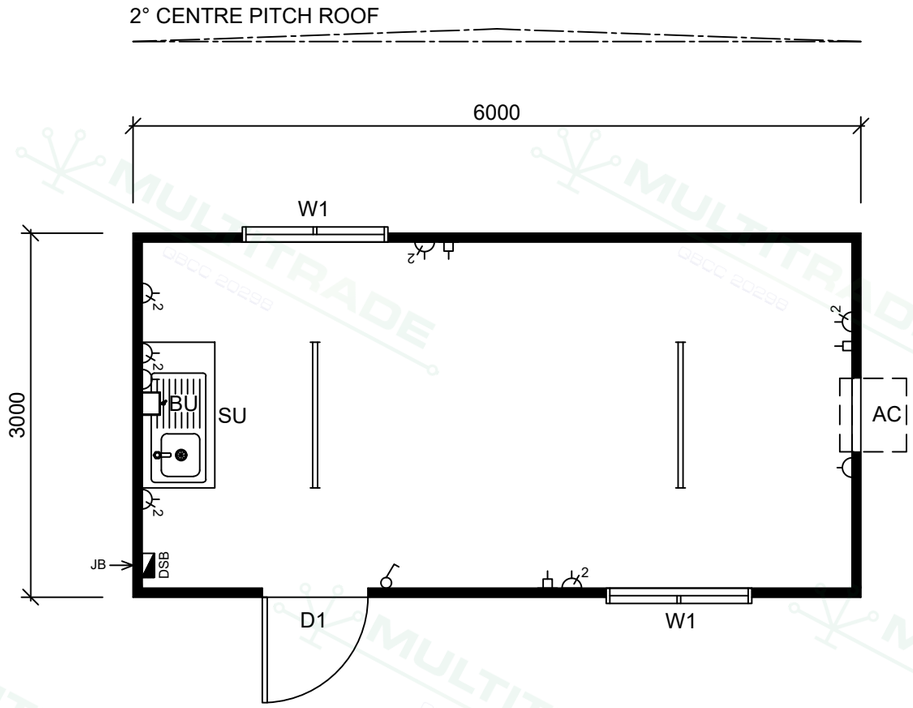

6.0x3.0m Crib Room - Floor Plan

Scale 1:50

Colour Schedule

External		
Cladding	-	Surfmist
Roof	-	Zincalume
Capping	-	Surfmist
Doors	-	White
Windows	-	White

Internal		
Vinyl	-	Grey
Walls	-	Grey
Ceiling	-	White
Cabinetry	-	White

Item List

Item	Qty	Description
D1	x(1)	2040x920mm External Metal Clad Door, Entrance Lockset.
W1	x(2)	900x1200mm Sliding Glass Window, Flyscreen.
AC	x(1)	3.9kw TECO Wall Mounted Reverse Cycle Air Conditioner.
SU	x(1)	1200mm Bench Top & Splashback, Cupboards Under, Single Bowl Single Drainer Sink (Cold Only).
BU	x(1)	3L Boiling Water Unit - Wall Mounted.

Notes

- 75mm Steel Frame Construction.
- 150x75mm PFC Bearers.
- C10015 Floor Joists @ 600mm Ctrs.
- 19mm T&G F11 Plywood Flooring.
- 2mm Commercial Vinyl Floor Covering.
- 2400mm Internal Ceiling Height.
- Pre-finished Plywood Internal Wall & Ceiling Lining, PVC Joiners , Cornice, Skirting & Corner Moulds.
- Wall & Ceiling Insulation.
- Horizontal 'Panelrib' Profile External Colorbond Cladding.
- Zincalume 'Trimdek' Profile Roof Sheeting.
- Colorbond Barge Capping With Stop Ends.

Electrical Legend

Icon	Qty	Description
DSB	x(1)	Internal Lockable Distribution Switchboard, Double Pole Main Switch, Double Pole Breakers & Light Test Point.
JB	x(1)	Junction Box - Electrical Point Of Entry
	x(1)	Light Switch (Double Pole)
	x(2)	10amp Single GPO (Double Pole)
2	x(6)	10amp Double GPO (Double Pole)
	x(3)	Draw Wire With Blank Plate
	x(2)	1200mm LED Batten Light Fitting. *(*Diffuser To Be Zip Tied)*

CLIENT APPROVAL

Signature: Date:

Rev.	Description	Date	By
A	Issued for Client Review	18/06/24	BW

MULTITRADE BUILDING HIRE

THIS DRAWING AND DESIGN IS THE SOLE PROPERTY OF JABEGIL PTY LTD T/A MULTITRADE BUILDING HIRE A.B.N. 36 010 138 600 IT MAY NOT BE REPRODUCED, COPIED WHOLE OR IN PART WITHOUT WRITTEN AUTHORITY.

CLIENT	DATE
	18/06/24

TITLE	SCALE
6.0x3.0m CRIB ROOM - FLOOR PLAN	1:50

DESIGN WIND LOAD	DRAWN	CHECKED
C2 (W50C)	BW	

DRAWING NUMBER	REVISION	SHEET SIZE
SQF-4370-02	A	A3