PRELIMINARY DRAWING

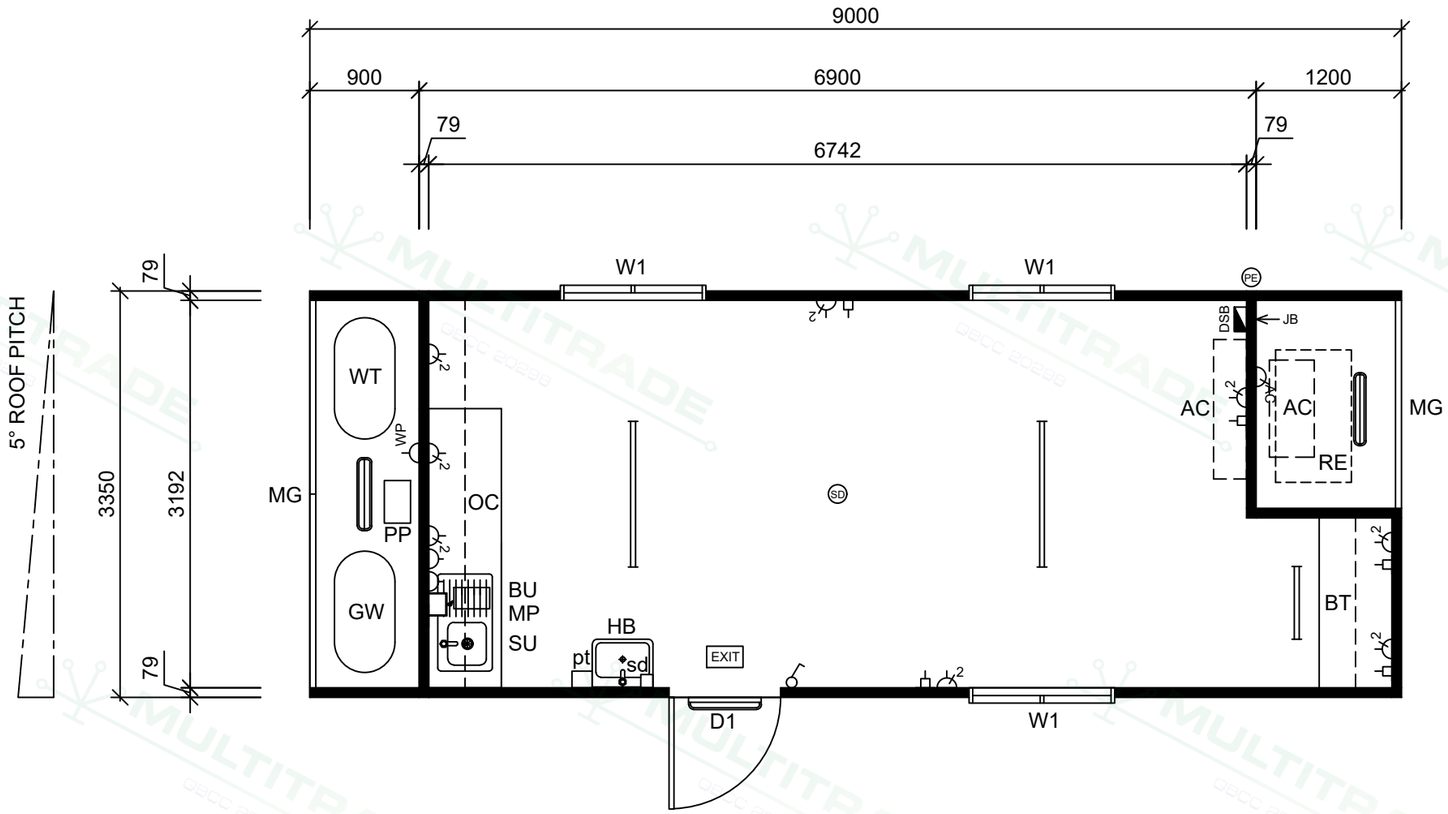

9.0x3.35m Solar Facility - Floor Plan

Scale 1:50

Colour Schedule

External		
Cladding	-	Surfmist
Roof	-	Zincalume
Capping	-	Surfmist
Doors	-	White
Windows	-	White

Internal		
Vinyl	-	Grey
Walls	-	Grey
Ceiling	-	White
Cabinetry	-	White

Item List

Item	Qty	Description
D1	x(1)	2040x920mm External Metal Clad Door, Glass Viewing Panel, Crimsafe Security Screen Over, Door Closer, Entrance Set.
W1	x(3)	1200x1200mm Sliding Glass Window, External Full Cover Crimsafe Mesh Security Screen, Internal Roller Blinds.
AC	x(1)	5.0kw MHI Inverter Reverse Cycle Split System Air Conditioner.
SU	x(1)	2300mm Bench Top & Splashback, Single Drawer & Cupboards Under, Single Bowl & Drainer Sink (Cold).
OC	x(1)	3190mm Overhead Cupboards.
BT	x(1)	1400mm Bench Top With Overhead Storage Cupboards.
BU	x(1)	3L Boiling Water Unit - Wall Mounted.
MP	x(1)	Macerator Pump - Under Sink.
HB	x(1)	Stainless Steel Hand Basin With 300mm Splashback, Spring Tap.
RE	x(1)	RedEarth Energy 'Bush Chook' Off Grid Power System *(*5x4.1kw Troppo Batteries = 20.5kWh, 12x590w Solar Panels).*
MG	x(2)	Lockable Fabricated Mesh Doors.
WT	x(1)	650L Portable Water Tank.
PP	x(1)	Water Pressure Pump, Filter.
GW	x(1)	650L Grey Water Tank.
sd	x(1)	Soap Dispenser.
pt	x(1)	Paper Towel Dispenser.

Notes

- 75mm Steel Frame Construction.
- 200x75mm PFC Chassis Bearers.
- C10015 Floor Joists @ 600mm Ctrs.
- 19mm T&G F11 Plywood Flooring.
- 2mm Commercial Vinyl Floor Covering, Coved 100mm Up Walls.
- 2400mm Internal Ceiling Height.
- Pre-finished Plywood Internal Wall & Ceiling Lining, PVC Joiners, Cornice, Skirting & Corner Moulds.
- R2.0 Wall Batts, R1.8 Ceiling Batts & R2.3 Roof Blanket Insulation.
- Colorbond 'Panelrib' Profile Horizontal Wall Cladding, R0.2 Thermal Building Wrap Under Cladding.
- Zincalume 'Trimdek' Profile Roof Sheeting.
- Colorbond Barge Capping With Stop Ends.

Electrical Legend

Icon	Qty	Description
DSB	x(1)	Metal Lockable Distribution Board, Double Pole 10kA Rated Main Switch, Double Pole 10kA Rated Breakers With Cirlock Breakers, Light Testing Point & Emergency Light Test Kit.
JB	x(1)	Electrical Point Of Entry.
	x(1)	Light Switch (Double Pole).
	x(2)	10amp Single GPO (Double Pole).
2	x(8)	10amp Double GPO (Double Pole).
WP	x(1)	External 10amp Single GPO (Double Pole).
AC	x(1)	External Isolator Switch - AC (Double Pole).
	x(5)	Draw Wire/Blank Plate.
	x(2)	1200mm LED Internal Light Fitting.
	x(1)	600mm LED Internal Light Fitting.
	x(3)	600mm LED External Light Fitting.
EXIT	x(1)	Emergency Exit Light.
SD	x(1)	Smoke Detector.
PE	x(1)	PE Cell.

CLIENT APPROVAL

Signature: Date:

Rev.	Description	Date	By
A	Issued for Client Review	07/07/25	AW

MULTITRADE BUILDING HIRE

THIS DRAWING AND DESIGN IS THE SOLE PROPERTY OF TRANSPORTABLE BUILDINGS AUSTRALIA PTY LTD T/AS TRANSBUILD, ABN 45 082 023 354. IT MAY NOT BE REPRODUCED, COPIED WHOLE OR IN PART WITHOUT WRITTEN AUTHORITY.

CLIENT	DATE
	07/07/25
TITLE: 9.0x3.35m SOLAR FACILITY - FLOOR PLAN	SCALE: 1:50

DESIGN WIND LOAD	DRAWN	CHECKED
C2 (W50C)	AW	
DRAWING NUMBER	REVISION	SHEET SIZE
SQF-4641-01	A	A3